Assembly Instructions

Hyperwork

Two-Piece Meeting Table

Tools Needed

- Phillips screwdriver or Phillips bit

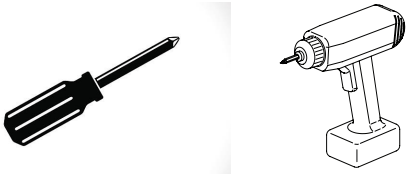

Tools / Hardware Provided

- 5.5mm (7/64") Allen Wrench
- Screws for Center Base (14)
- Bolts (4)
- Washers (4)

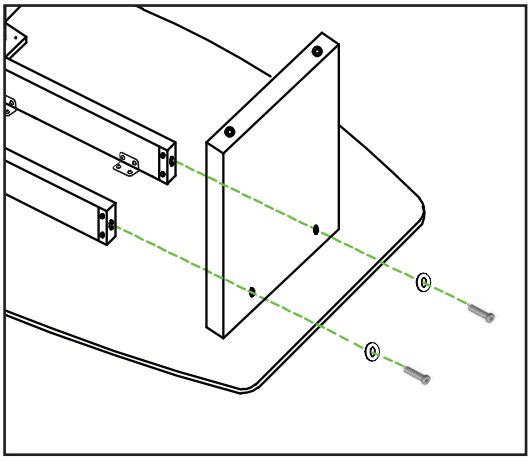

Step 1

Place the two (2) table top secition on a smooth, clean work surface on the floor. Using two (2) washers on the leg bolts and secure one of the end table bases to the understructure of the table top as shown at right.

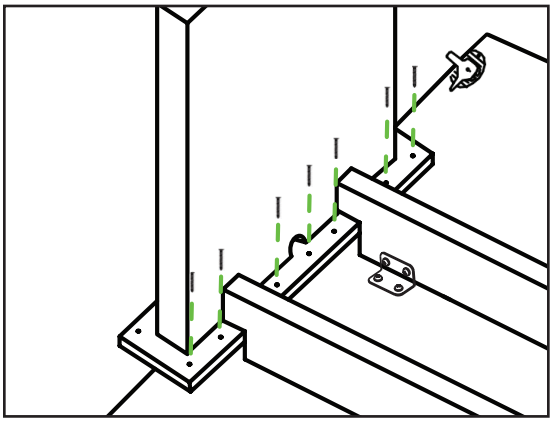

Step 2

Use seven (7) of the included wood screws to secure the center base (with attaching plate pre-installed) to the end of the understucture of the same top that has the base from Step 1 attached.

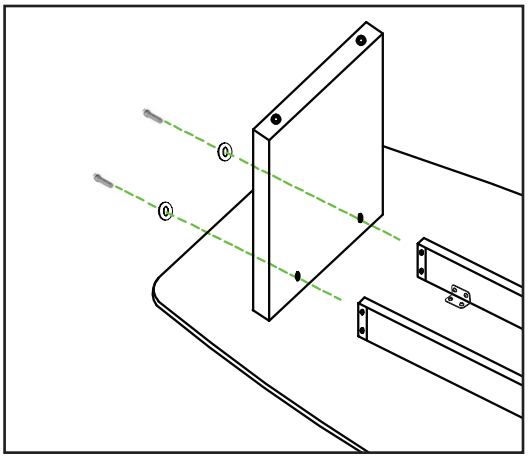

Step 3

Secure the remaining end table base to the understructure of the remaining top with the two (2) reminaing washers and lag bolts.

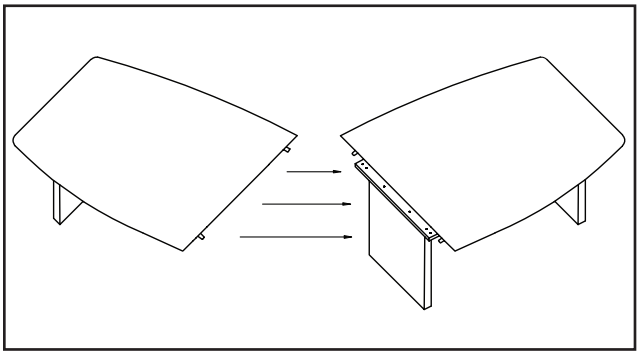

Step 4

With assistance, turn the table top with two (2) bases attached in an upright position. Then turn the remaining top upright and place the end that joins the upright assembly on the center base. After locking the two (2) top sections together, use the remaining seven (7) wood screws to secure the top to the center base.