Assembly Instructions

Trestle

Meeting Tables
Models T67, T68

Parts	Quantity
A. Top	1
B. Legs / Bases	2
C. Stabilizier Beam / Bar	2
D. 4mm x 1.5" Hex Head bolts	12

Tools Needed

- 4mm Hex Head driver or power screwdriver bit

Step 1

Remove the two (2) Legs / Bases (B) and place them the approximate width of the Beams (C) apart. Each end of the Beams (C) will slide into the notches in the rails of the Legs / Bases (B) as shown at right. Press in firmly, then secure each beam with two (2) Bolts (D) on each end.

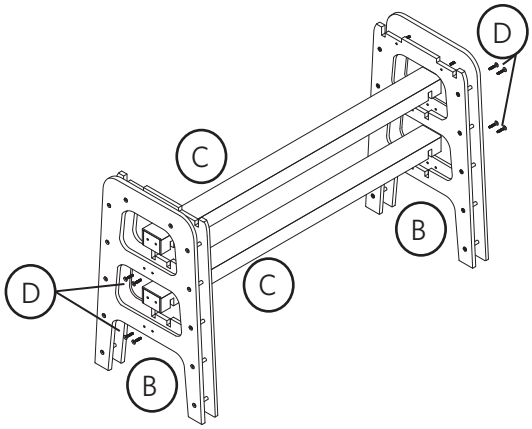

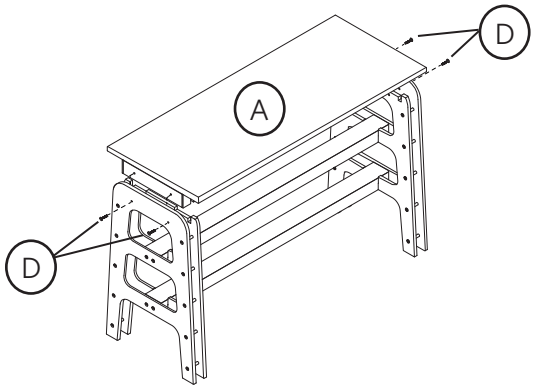

Step 2

The apron understructure of the Top (A) slide into the notches in the rails of the Legs / Bases (B) as shown at left. Press in firmly, then secure the Top (A) with two (2) Bolts (D) inserted through the Legs / Bases (B) into the apron understructure of the Top (A).

Step 3

Your Trestle table is now ready to set in place for use!

NOTE: Periodically check that the Bolts on the bases are secure. Moving the table to another room or location may require the bolts to be re-tightened.